



## Euro-fi Wireless (Libra) Dual Optical Smoke Detector (EUW-PA-02)

The EUW-PA-02 wireless dual optical smoke detector is the latest in wireless smoke detector technology. It is a fully intelligent device and compatible with all Euro-fi wireless Translator and Expander modules.

The detector is designed for open area protection and utilises dual-path optical smoke detection technologies and algorithms for improved performance, whilst maintaining the high levels of unwanted alarm rejection.

Utilising well-proven adaptive radio signal processing algorithms ensures that the highest levels of life safety and system reliability are achieved. An in-built magnet test allows easy activation to verify correct functionality and response.

\* For BASE COMPATIBILITY see page 3

## TECHNICAL DATA

Operating frequency range	868 – 870 MHz
Max radiated power	14dBm (25mW)
Operating frequency channels	7
Communications range (in open space)	<200m
Dimensions	110mm x 70mm
Temperature range (no icing)	-10°C to +55°C **
Max tolerated humidity (non condensing)	95% RH
IP Rating	40

\*\* Performance may vary at extremes of range


## KEY FEATURES

- Advanced dual-path optical chamber design
- Internal algorithm processing optimises performance
- 3rd party approved
- Up to 10 year battery life
- Utilises standard low-cost lithium battery technology
- Bi-directional wireless communications
- Compatible with all Euro-fi translators and expanders
- 5 year product warranty
- Device identification tab
- Dual angle scattering analysis
- Fast test feature for engineer testing

## APPROVALS

- BS EN 54-7 Smoke Detectors
- BS EN54-25: Components using radio links

## TECHNICAL INFORMATION

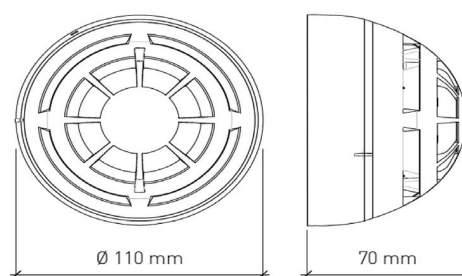

## LED INDICATION

The device is equipped with 2 tri-colour LEDs (red/green/amber) that provide visual indication for functional conditions and battery levels as indicated in the sections below:

### OPERATIONAL STATUS INDICATIONS

STATUS	AMBER LED	GREEN LED	RED LED
Power up	-	1 second on then	4 x 0.5 seconds on
Linking to system	-	Blinking until link is complete	-
Link procedure has failed	-	-	Continuous
Normal condition	-	-	-
Alarm condition	-	-	0.5 second on & 0.5 second off
Main battery fault	0.1 second on & 5 seconds off	-	-
Secondary battery fault	-	0.1 second on & 5 seconds off	-
Both batteries fault	0.1 second on & 5 seconds off	0.1 second on & 5 seconds off	-
Other fault	Sequential bi-colour flashing		-
Tamper	-	-	-
Loss of radio link with translator/expander	-	-	-

## COMMUNICATION QUALITY ASSESSMENT

It is possible to assess the wireless communication quality between the device and translator or expander using the built in test facility. After successful programming of the device, changing the “Program” switch to the “ON” position will set the device into test mode and the LED will start blinking according to the table below:

STATUS	AMBER LED	GREEN LED	RED LED
No connection	Fail	-	Two flashes
Link margin is less than 10dB	Poor - not acceptable	-	One flash
Communication with link margin from 10dB to 20dB	Medium/Low - not recommended	One flash	-
Communication with link margin from 20dB to 30dB	Good	Two flashes	-
Communication with link margin over 30dB	Excellent	Two flashes	-

## BASE COMPATIBILITY

This device is supplied with a standard base and is compatible with the following Euro-fi base sounders:

- EUW-BS-02 Wireless Sounder Base
- EUW-BSB-02 Wireless Sounder Base Visual Indicator

