


Orbis

Conventional Galvanic Barrier

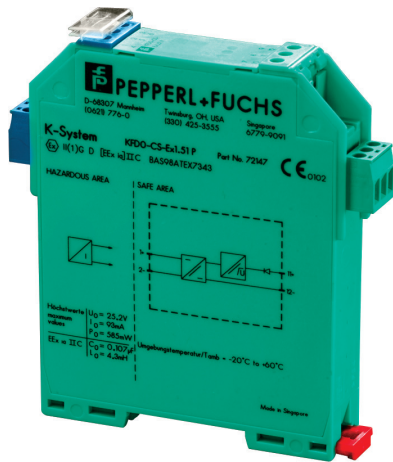

Technical data (cont'd)

Voltage U_0	28 V		
Current I_0	93 mA		
Power P_0	0.65 W		
Permissible circuit values ignition protection class, category	[EEx ia]		
Explosion group	IIA IIB IIC		
Max. external capacitance	1.04 μ F 0.39 μ F 0.13 μ F		
Max. external inductance	33.6 mH 12.6 mH 4.2 mH		
<u>Fail-safe maximum voltage U_m</u>			
Power supply	250 V		
Entity parameters	FM No. 1Z2A1.AX Terminals 1+, 2-, 4+, 5-		
Voltage V_{oc}	26.71 V		
Current I_{sc}	88.8 mA		
Voltage V_t	- V		
Explosion group	A&B	C&E	D, F&G
Max. external capacitance	0.16 μ F	0.48 μ F	1.28 μ F
Max. external inductance	4.60 mH	18.32 mH	37.55 mH
	CSA No. LR65756-13		
Safety parameters	Terminals 1+, 2-, 4+, 5-		
<u>KFD0-CS-Ex1.51</u>			
Voltage V_{oc}	28.0 V		
Current I_{sc}	93.3 mA		
Explosion group	A&B	C&E	D, F&G
Max. external capacitance (C_a)	0.14 μ F	0.42 μ F	0.42 μ F
Max. external inductance (L_a)	3.1 mH	16.8 mH	16.8 mH
Transfer characteristics			
Calibrated accuracy at 20 °C (68 OF)	$\leq \pm 200 \mu$ A inclusive calibration, linearity, hysteresis and load fluctuations at the output up to 1 kOhm load		
Temperature drift	$\leq 2 \mu$ A / K (273 K ... 323 K) $\leq 5 \mu$ A / K (253 K ... 333 K)		
Rise time	≤ 20 ms at 20 ms and 250 Ohm load		
<u>Conformity to standard</u>			
Isolation co-ordination	to EN 50 178		
Galvanic isolation	to EN 50 178		
Climatical condition	to IEC 721		
EMC	to EN 50 081-2, EN 50 082-2, NAMUR NE 21		
IP rating	IP20		
Weight	≈ 100 g (≈ 3.5 oz)		
Ambient temperature	-20 °C ... +60 °C (-4 °F ... 140 °F)		
Max. wire size	2.5 mm ² (14 AWG)		

Product Overview

Product	Conventional Galvanic Barrier
Part No.	29600-378

Product Information

The Conventional Galvanic Barrier is DIN-Rail mounted and installed in the safe area to ensure system integrity.

The device also enables compliance with the ATEX directive

Technical data

All data is supplied subject to change without notice. Specifications are typical at 24 V, 23°C and 50% RH unless otherwise stated.

Inputs (Not intrinsically safe) Terminals 12-, 11+; 8-, 10-, 9+

Nominal voltage DC 4 V ... 35 V

Max. current consumption 0 mA ... 40 mA

Max. power dissipation
at 40 mA and $U_E < 23.7$ V < 700 mW per channel
at 40 mA and $U_E > 23.7$ V < 1.2 W per channel

Fail-safe maximum voltage U_m 250 V

Field circuit (Intrinsically safe) Terminals 1+, 2-, 4+, 5-

Min. output voltage
for 3 V < $U_E < 23.7$ V $U_E - (0.4 \times \text{current in mA}) - 0.7$
for $U_E > 23.7$ V 23 V - (0.4 x current in mA)

Max. short-circuit current at
 $U_E > 23.7$ V ≤ 65 mA

Max. transfer current ≤ 40 mA

Details of Certificate
of Conformity BASEEFA No. Ex-88.B.2331
Other international approvals

36 Brookside Road, Havant | Tel: +44 (0)23 9249 2412 | Email: sales@apollo-fire.com
Hampshire, PO9 1JR, UK. | Fax: +44 (0)23 9249 2754 | Web: www.apollo-fire.co.uk




A HALMA COMPANY


© Apollo Fire Detectors Limited 2017




Base wiring diagram

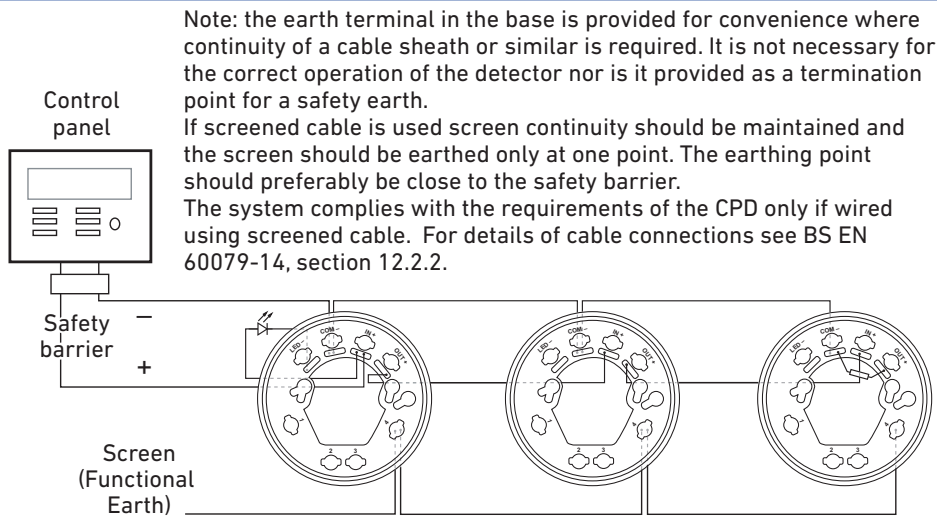

Three bases wired with a common LED

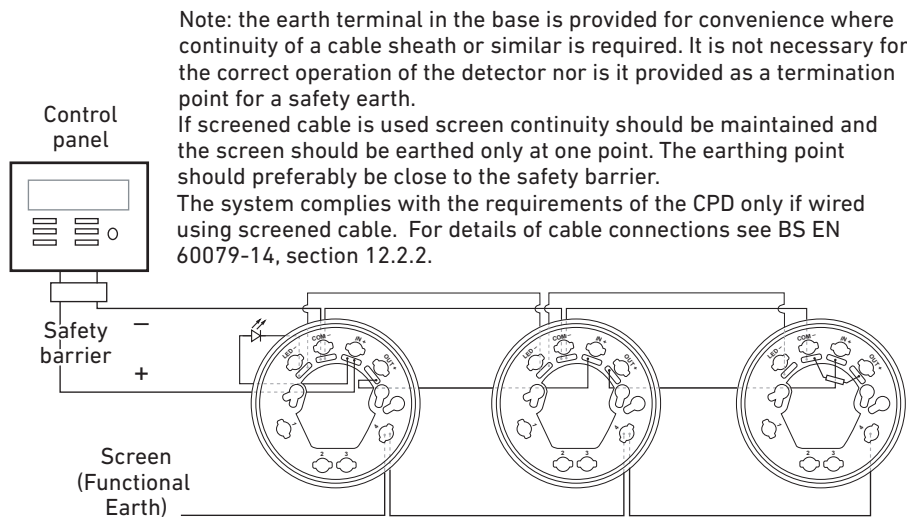

Internal systematic diagram

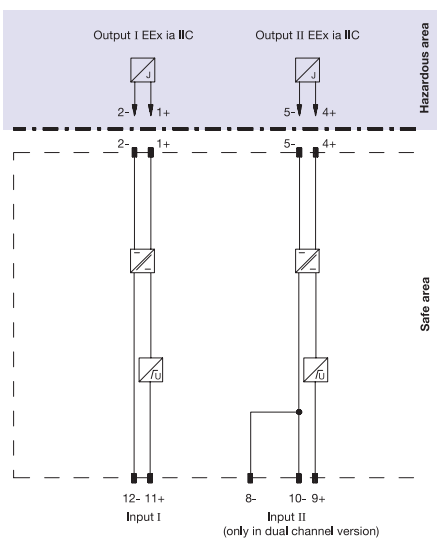

Conventional I.S. Configuration

